


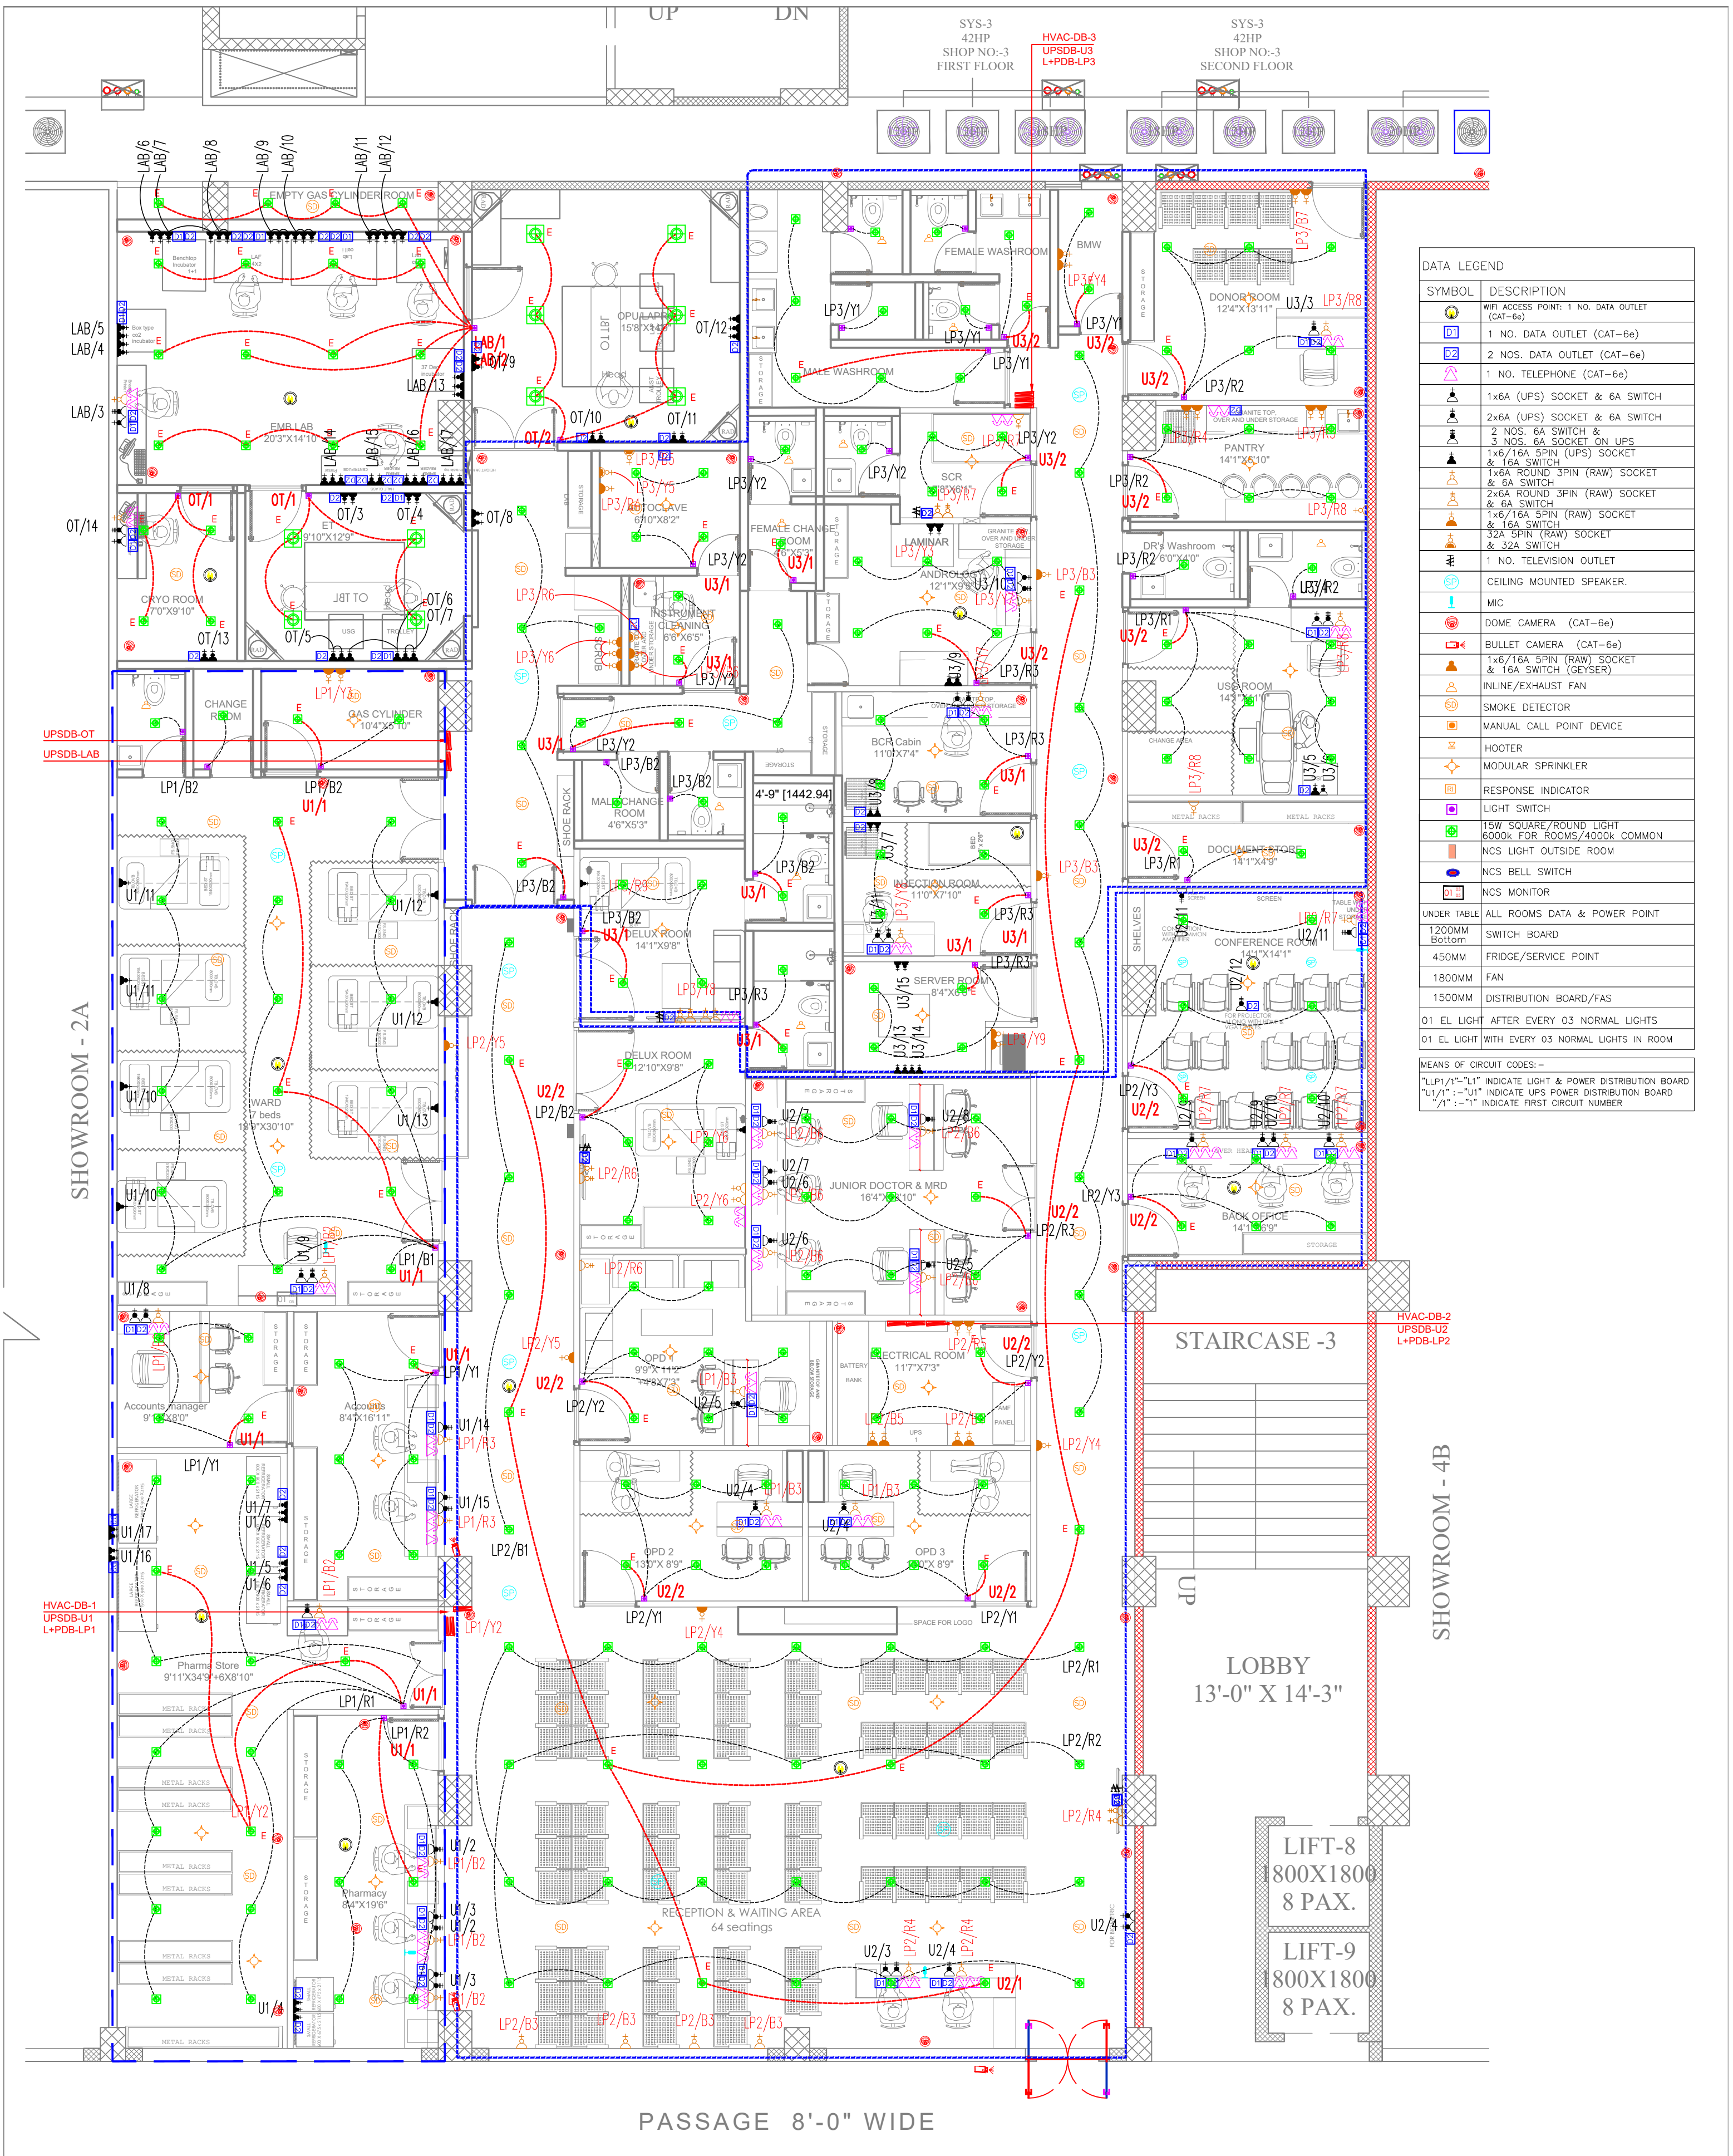

DATA LEGEND	
SYMBOL	DESCRIPTION
	WIFI ACCESS POINT: 1 NO. DATA OUTLET (CAT-6e)
	1 NO. DATA OUTLET (CAT-6e)
	2 NOS. DATA OUTLET (CAT-6e)
	1 NO. TELEPHONE (CAT-6e)
	1x6A (UPS) SOCKET & 6A SWITCH
	2x6A (UPS) SOCKET & 6A SWITCH
	2 NOS. 6A SWITCH & 3 NOS. 6A SOCKET ON UPS
	1x6/16A 5PIN (UPS) SOCKET & 16A SWITCH
	1x6A ROUND 3PIN (RAW) SOCKET & 6A SWITCH
	2x6A ROUND 3PIN (RAW) SOCKET & 6A SWITCH
	1x6/16A 5PIN (RAW) SOCKET & 16A SWITCH
	32A 5PIN (RAW) SOCKET & 32A SWITCH
	1 NO. TELEVISION OUTLET
	CEILING MOUNTED SPEAKER.
	MIC
	DOME CAMERA (CAT-6e)
	BULLET CAMERA (CAT-6e)
	1x6/16A 5PIN (RAW) SOCKET & 16A SWITCH (GEYSER)
	INLINE/EXHAUST FAN
	SMOKE DETECTOR
	MANUAL CALL POINT DEVICE
	HOOTER
	MODULAR SPRINKLER
	RESPONSE INDICATOR
	LIGHT SWITCH
	15W SQUARE/ROUND LIGHT 6000K FOR ROOMS/4000K COMMON
	NCS LIGHT OUTSIDE ROOM
	NCS BELL SWITCH
	NCS MONITOR
	ALL ROOMS DATA & POWER POINT
	SWITCH BOARD
	FRIDGE/SERVICE POINT
	FAN
	DISTRIBUTION BOARD/FAS
	01 EL LIGHT AFTER EVERY 03 NORMAL LIGHTS
	01 EL LIGHT WITH EVERY 03 NORMAL LIGHTS IN ROOM
MEANS OF CIRCUIT CODES:-	
LP1/-/*L1* INDICATE LIGHT & POWER DISTRIBUTION BOARD	
U1/-/*U1* INDICATE UPS POWER DISTRIBUTION BOARD	
/*1*/-/*1*/ INDICATE FIRST CIRCUIT NUMBER	